


Brida Welding Neck ANSI/ASME B16.5 Class 150 lbs

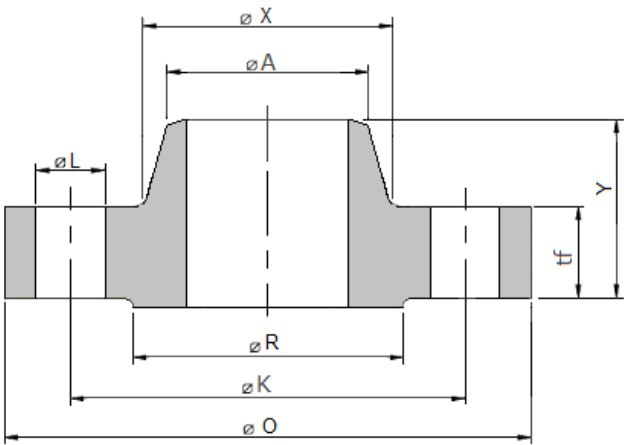

Dimensiones en pulgadas y (milímetros)

Tamaño Nominal Tubería	Ø exterior O	Mínimo espesor t_f	Ø Hub X	Ø Superior Hub A	Longitud Hub Y	Ø Raised Face R	Taladros			Ø Tornillo
							Ø K centro tal.	Nº tal	Ø tal. L	
1/2 (15)	3.5 (90)	0.38 (9.6)	1.19 (30)	0.84 (21.3)	1.81 (46)	1.38 (34.9)	2.38 (60.3)	4	5/8 (15.875)	1/2 (12.7)
3/4 (20)	3.88 (100)	0.44 (11.2)	1.5 (38)	1.05 (26.7)	2 (51)	1.69 (42.9)	2.75 (69.9)	4	5/8 (15.875)	1/2 (12.7)
1 (25)	4.25 (110)	0.5 (12.7)	1.94 (49)	1.32 (33.4)	2.12 (54)	2 (50.8)	3.12 (79.4)	4	5/8 (15.875)	1/2 (12.7)
1 1/4 (32)	4.62 (115)	0.56 (14.3)	2.31 (59)	1.66 (42.2)	2.19 (56)	2.5 (63.5)	3.5 (88.9)	4	5/8 (15.875)	1/2 (12.7)
1 1/2 (40)	5 (125)	0.62 (15.9)	2.56 (65)	1.9 (48.3)	2.38 (60)	2.88 (73)	3.88 (98.4)	4	5/8 (15.875)	1/2 (12.7)
2 (50)	6 (150)	0.69 (17.5)	3.06 (78)	2.38 (60.3)	2.44 (62)	3.62 (92.1)	4.75 (120.7)	4	3/4 (19.05)	5/8 (15.875)
2 1/2 (65)	7 (180)	0.81 (20.7)	3.56 (90)	2.88 (73)	2.69 (68)	4.12 (104.8)	5.5 (139.7)	4	3/4 (19.05)	5/8 (15.875)
3 (80)	7.5 (190)	0.88 (22.3)	4.25 (108)	3.5 (88.9)	2.69 (68)	5 (127)	6 (152.4)	4	3/4 (19.05)	5/8 (15.875)